




# THEO AC FF

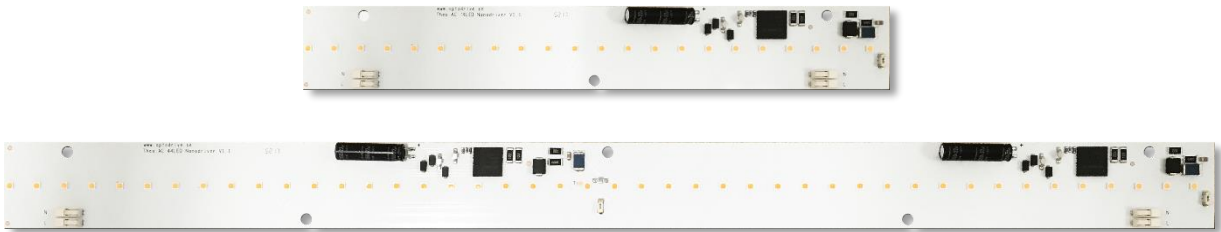

## THEO AC FLICKERFREE

L28W4 | L56W4

A driverless solution ceiling and tasklight  
in professional fixtures.

**No driver is required!**





## Key features

---

### Story

Designed for downlight and other places where the need is to create a good atmosphere for people to dwell in whether they take care of business or socialize.

These LED modules or LED-light engines for fixtures are designed with internal drivers and are therefore very easy to connect into applications with different dimming scenarios. The light output efficiency is the highest available on the market for these types of applications. Our latest design feature TOD (thin optical device) is integrated in the LED module for a bright and consistent light experience.

### Key features

- High efficiency
- Optimized Uniformity
- Lens with Connector
- Architectural Lighting
- Commercial Lighting
- Flickerfree





# Theo AC FF

Document no:  
n/a

Revision:  
1.3

Page:  
Page 3 of 23

Object:  
**Datasheet Theo AC FLICKERFREE**

Author:  
SL

Date:  
2019-11-07

## Content

---

Introduction.....	4
Short form Characteristics.....	6
Article number structure Theo AC FF.....	7
Ordering data .....	8
Dimensions LED-light engine Theo.....	10
Mounting instructions.....	11
Photometrical.....	12
CCT structure graphical representation .....	13
Electro Optical data .....	14
Lifetime (Calculated) .....	15
Surge.....	17
Verification of Conformity.....	19
Precautions for use.....	20
ROHS II Compliant .....	21



## Introduction

---

### Theo package

The same package can be used for Office light, Retail ambient light, bathroom light and Industrial light fittings etc. The solution is developed to make it easy for the designers. In the design concept there are standard dimmers, that fits the whole Optodrive™ concept.

### AC design

All driver and dimmer components are built-in.

The advantage with an AC driver that has been built-in is:

- Lifetime – Connected to a heat sink and therefore has a controlled environment
- Dimming – Dimming via standard trailing edge dimmers
- Small – No extra boxes
- Simple – Easily adapted into to the production line

### Light output

Colour stability is important to ensure that the installation has a uniform light output. Parameters such as binning, lifetime and thermal control are vital for good results.

### Flickerfree

OptoDrive Theo FlickerFree has a minimal flicker percent thanks to electronics. This gives a pleasant light for example in tasklights.



## Theo AC FF

Document no:  
n/a

Revision:  
1.3

Page:  
Page 5 of 23

Object:  
**Datasheet Theo AC FLICKERFREE**

Author:  
SL

Date:  
2019-11-07

### Technical attributes

- Energy saving and a very high lumen output
- High Colour Rendering
- Uniform Colour temperature
- Controlled lifetime
- Simple integration
- High Power Factor
- Low Total Harmonic Distortion
- Low Flicker percentage





## Short form Characteristics

MECHANICAL	L28W4	L56W4			
Module dimension with cover	280x41mm	560x41mm			
Weight					
Assembly holes	4.3 mm				
Wire connector	Terminal Blocks for automatic wiring				

ELECTRICAL					
Power	9W	16W	16W	24W	32W
Input voltage	230VAC				
Input voltage range	220-240VAC				
Power factor	>0.95				
Total harmonic distortion	>15%				
Input current	40mA	70mA	70mA	105mA	140mA
Surge protection	1000V on board			1250V	
Over temp. protection	150°C				
Energy class	A+				
Inrush Current	TBD				

PHOTOMETRICAL					
Flux nominal	1000lm	1700lm	1700lm	2500lm	3200lm
Efficiency	110lm/W			110lm/W	
Number of LED's	22	22	24	48	48
Colour Rendering Index	Ra>80 Ra>90				
SDCM (Mac Adam)	3				
Flicker percent	<10%				
Flicker index	<0.05			<0.06	
Spread angle lens	n/a (120° without lens)				
Colour temperatures	2700K, 3000K, 4000K				

ENVIRONMENTAL					
Temperature range	-40°C to 65°C (Absolute maximum temp Tc 65°C)				
Relative Humidity	10-75%				
Ambient air pressure	500-1060 HPa				

LIFETIME					
Life length L70B10*	>50 000h				

\* Lifetime based on LM80 and interpolation according to TM21 standard.



## Theo AC FF

Document no:  
n/a

Revision:  
1.3

Page:  
Page 7 of 23

Object:  
**Datasheet Theo AC FLICKERFREE**

Author:  
SL

Date:  
2019-11-07

## Article number structure Theo AC FF

---

THEO L56W4 AC.P.230.N.XYY-NN.FF

LxxW4	L28 – 280 mm long, L56 – 560 mm long
AC	AC= 230VAC, ED=External Driver required, ID=Internal Driver
P	Power (Watt)
V	Voltage: 230VAC
N	Amount of LEDs
X	CRI: 8=Ra>80, 9=Ra>90
YY	CCT: 27 =2700K, 30 =3000K, 40 =4000K
NN	Viewing angle code (NN = n/a)
FF	Flickerfree version



Article name and versions

ARTICLE NAME	Description						
	POWER (W)	CURRENT (V)	CRI (Ra)	CCT (K)	LUMEN (Lm)	BEAM ANGLE (Deg)	Flicker (%)
Theo L28W4 AC.9.230.22.827-NN.FF	9	230	80	2700	900	120	<10
Theo L28W4 AC.9.230.22.830-NN.FF	9	230	80	3000	950	120	<10
Theo L28W4 AC.9.230.22.840-NN.FF	9	230	80	4000	1000	120	<10
Theo L28W4 AC.9.230.22.927-NN.FF	9	230	90	2700	700	120	<10
Theo L28W4 AC.9.230.22.930-NN.FF	9	230	90	3000	850	120	<10
Theo L28W4 AC.9.230.22.940-NN.FF	9	230	90	4000	900	120	<10
Theo L28W4 AC.16.230.22.827-NN.FF	16	230	80	2700	1600	120	<10
Theo L28W4 AC.16.230.22.830-NN.FF	16	230	80	3000	1700	120	<10
Theo L28W4 AC.16.230.22.840-NN.FF	16	230	80	4000	1800	120	<10
Theo L28W4 AC.16.230.22.927-NN.FF	16	230	90	2700	1350	120	<10
Theo L28W4 AC.16.230.22.930-NN.FF	16	230	90	3000	1450	120	<10
Theo L28W4 AC.16.230.22.940-NN.FF	16	230	90	4000	1500	120	<10
Theo L56W4 AC.16.230.44.827-NN.FF	16	230	80	2700	1600	120	< 10
Theo L56W4 AC.16.230.44.830-NN.FF	16	230	80	3000	1700	120	< 10
Theo L56W4 AC.16.230.44.840-NN.FF	16	230	80	4000	1800	120	< 10
Theo L56W4 AC.16.230.44.927-NN.FF	16	230	90	2700	TBD	120	< 10
Theo L56W4 AC.16.230.44.930-NN.FF	16	230	90	3000	TBD	120	< 10
Theo L56W4 AC.16.230.44.940-NN.FF	16	230	90	4000	TBD	120	< 10
Theo L56W4 AC.24.230.44.827-NN.FF	24	230	80	2700	1600	120	< 10
Theo L56W4 AC.24.230.44.830-NN.FF	24	230	80	3000	1700	120	< 10
Theo L56W4 AC.24.230.44.840-NN.FF	24	230	80	4000	1800	120	< 10
Theo L56W4 AC.24.230.44.927-NN.FF	24	230	90	2700	TBD	120	< 10
Theo L56W4 AC.24.230.44.930-NN.FF	24	230	90	3000	TBD	120	< 10
Theo L56W4 AC.24.230.44.940-NN.FF	24	230	90	4000	TBD	120	< 10
Theo L56W4 AC.32.230.44.827-NN.FF	32	230	80	2700	3000	120	< 10
Theo L56W4 AC.32.230.44.830-NN.FF	32	230	80	3000	3200	120	< 10
Theo L56W4 AC.32.230.44.840-NN.FF	32	230	80	4000	3300	120	< 10
Theo L56W4 AC.32.230.44.927-NN.FF	32	230	90	2700	2400	120	< 10
Theo L56W4 AC.32.230.44.930-NN.FF	32	230	90	3000	2600	120	< 10
Theo L56W4 AC.32.230.44.940-NN.FF	32	230	90	4000	2750	120	< 10





## Theo AC FF

Document no:  
n/a

Revision:  
1.3

Page:  
Page 9 of 23

Object:  
Datasheet Theo AC FLICKERFREE

Author:  
SL

Date:  
2019-11-07

## Ordering data

### Theo L28W4 AC FF – Packaging information

Description	Qty (pcs)	Dimension (cm)			GW (kg)
		Length	Width	Height	
Inner box	TBD	66.0	35.0	8.8	
Outer box	160	68.0	37.0	28.9	TBD


### Theo L56W4 AC FF – Packaging information

Description	Qty (pcs)	Dimension (cm)			GW (kg)
		Length	Width	Height	
Inner box	36	66.0	35.0	8.8	
Outer box	108	68.0	37.0	28.9	18.5




## Dimensions LED-light engine Theo


TheoL28W4 AC.P.230.22.8yy-NN

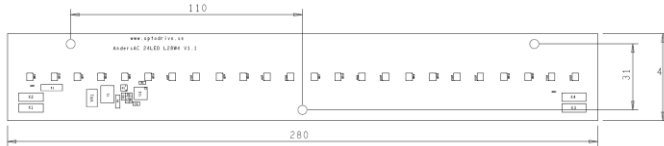

TheoL56W4 AC.P.230.44.8yy-NN


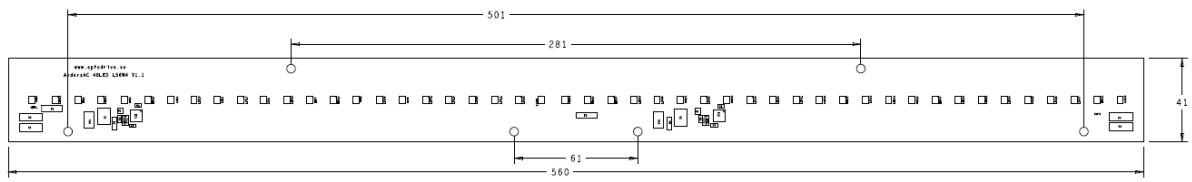


## Mounting instructions

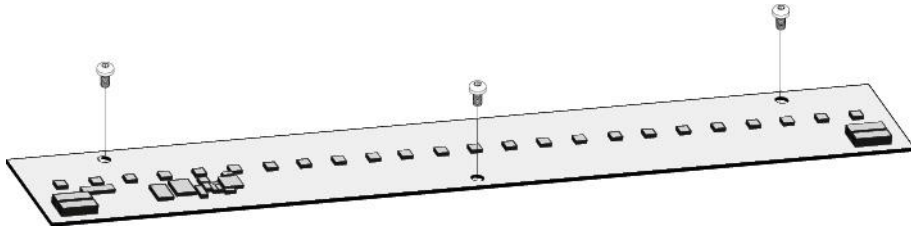

### Wiring

Type of wire	AWG	mm <sup>2</sup>
Stranded	22-18	0.32-0.8mm <sup>2</sup>
Solid	24-18	0.51-1.02∅ (0.2-0.8mm <sup>2</sup> )
Insulation diameter	Max 2.1 mm	

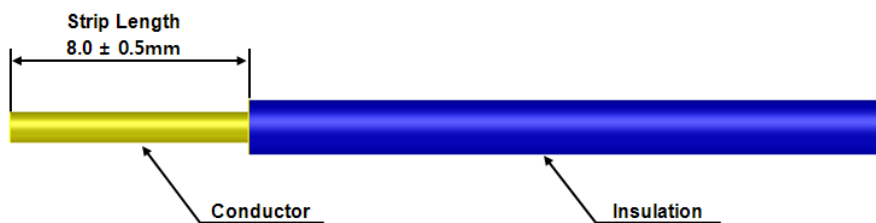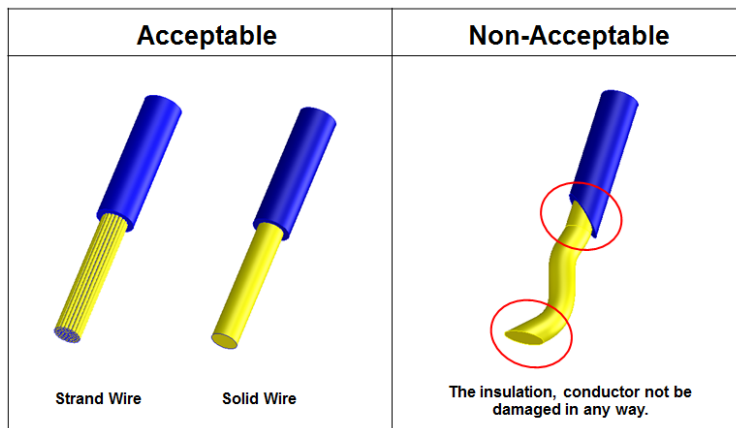

# Photometrical


## Flux

Parameter	Symbol	Value			Unit
		Min	Typ	Max	
Luminous Flux	$\Phi_v$				lm
	20W $\Phi_v$		2000		lm
	$\Phi_v$				
Correlated Colour Temperature	27*(2) CCT		2700		K
	30*(2) CCT		3000		K
	40*(2) CCT		4000		K
CRI	$R_a$	80	84	-	-
	$R_a$	90	93		
Power	$P_o$		9		W
	$P_o$		16		W
			16		W
			32		W

Electro-Optical characteristics LED module at  $I_f=xxmA$ , 230VAC,  $T_A=25^\circ C$


(2)See detailed information in chapter " Binning structure graphical representation"

## Colour Spectrum

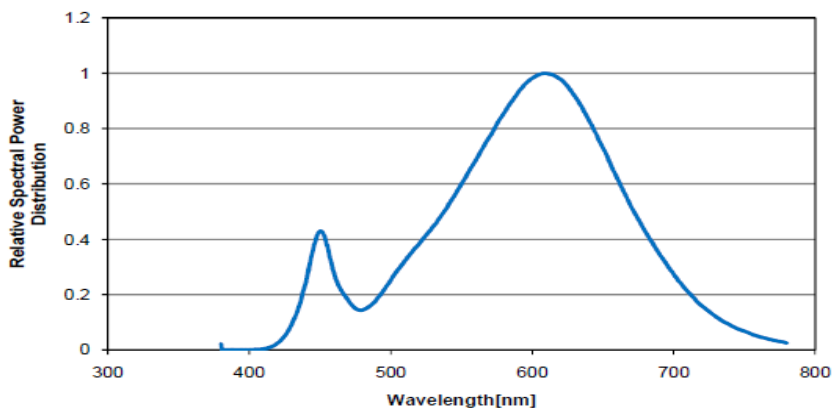

## CCT structure graphical representation

### Binning structure graphical representation IEC 1976

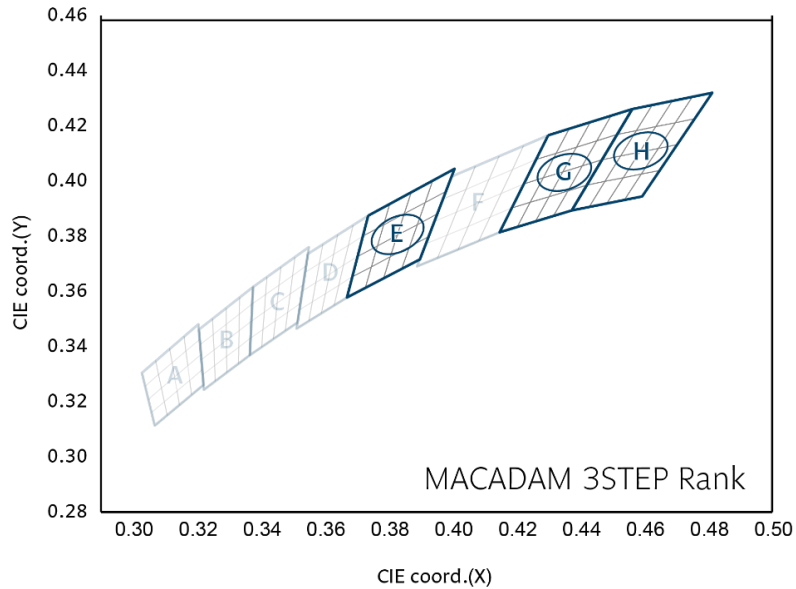

\* Note that the Blue boxes represent Energy Star Rank

Short form in diagram	Colour Code	CCT
H	27	2700K
G	30	3000K
E	40	4000K

### Colour Rendering Index (CRI)

CRI Code	CRI (min) Ra
8	>80
9	>90

### Short form letters for CCT (K)


Colour Code	CCT
27	2700K
30	3000K
40	4000K



## Electro Optical data

### Current vs. Voltage


*With increasing voltage the light output and the heat increases.*

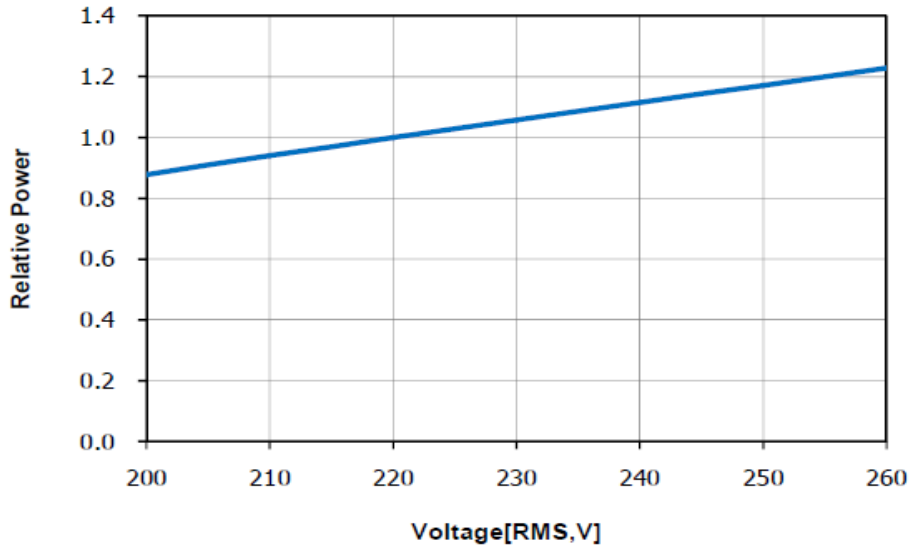

## Lifetime (Calculated)

### Measurement points

When the measurement takes place you verify that the temperature on the marked measurement points is satisfying. Pending on the result you know what lifetime to expect from the module. This step will be implemented after the heat sink has been connected properly!

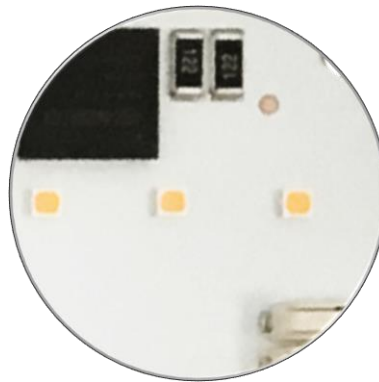

The lifetime is calculated at the maximum temperature recommended at the Tc (measuring point). It is important not to exceed this recommendation.

### Projected lifetime based on TM-21

The power load used with the LED module is according to the “lumen maintenance projection”. It is a LM80 projected lifetime based on discreet LEDs tested in the stated temperature environment at a 30mA power load.

	55°C	65°C	75°C	85°C
<b>L70B10</b>	>50 000h	>50 000h	>50 000h	>50 000h
<b>L80B10</b>	>50 000h	47 000h	38 000h	33 000h
<b>L90B10</b>	28 000h	24 000h	20 000h	18 000h



### Measurement Control


The recommended maximum value is 65°C on Tc or measuring point. If this value is exceeded we cannot guarantee the function and the lifetime of the product. The purpose of the measurement is to control the Junction (Tj) temperature of the LED and also in order to control the performance on the complete setup. By measuring the junction temperature (Tj) the average lifetime of the product is known.

*The thermal connection is measured in temperature vs. Power.*

### Maximum Temperature

Secure the temperature in your application not to exceed 65°C. Read more in the section “Measurement control”.

### Temperature Characteristics

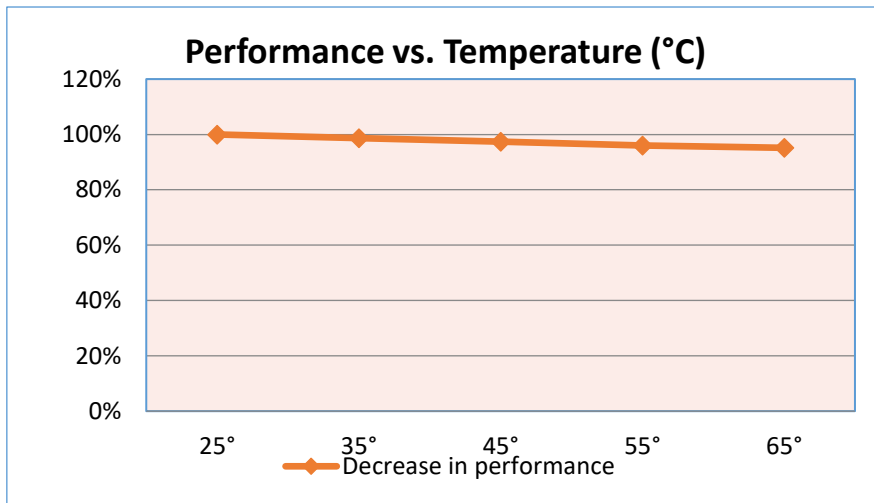


Consider the thermal capabilities of where the LED module is to be fitted. The temperature is an important factor for light output as well as for long time light output degradation.



## Surge

### Surge


This document specifies how to connect Optodrive AC modules to achieve long life installation both with Surge, Burst and other problematic installation questions:

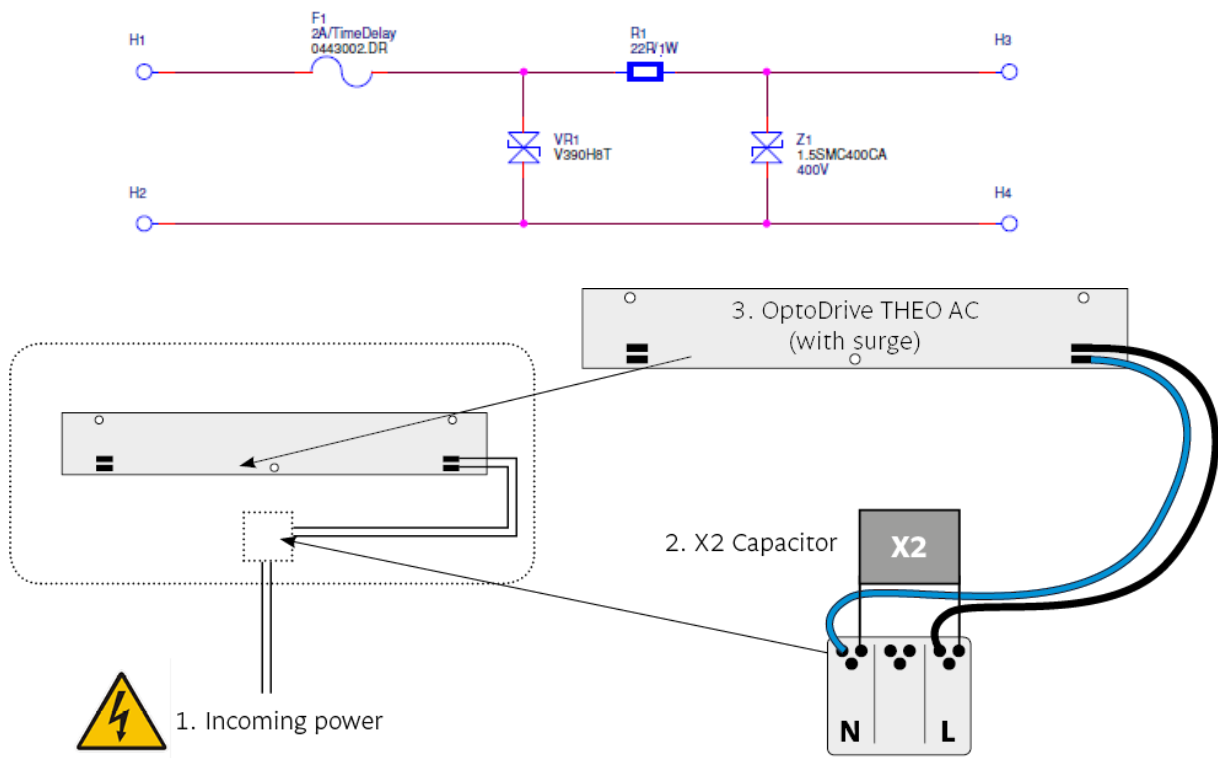

The installation set up requires an X2 Capacitor parallel to L1 and N to handle the fast and high voltage transients generated by the magnetic ballast.



### Set-up

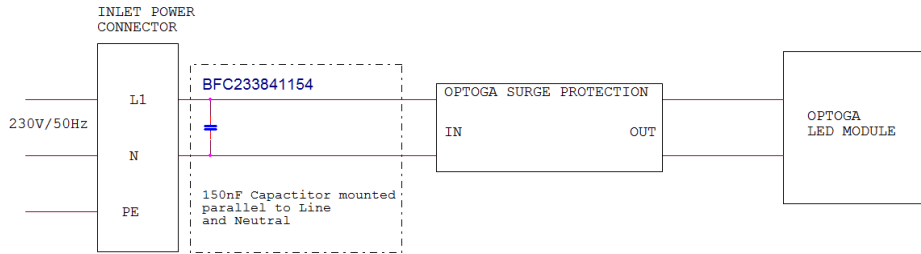

Surge protection IEC 61000-4-5  
The LED module passed the test at 1250V Surge



## Verification of Conformity

The module are under testing at Intertek Semco according to IEC 62031.

Radio Disturbance	IEC 55015:2006 + A1:2007 + A2:2009	
SURGE	IEC 61000-4-5	1 kv
Fast transient BURST	IEC 61547	2 kv
SAFETY	IEC 62031:2008	
Photo Biological Safety	IEC 62471:2008	
Radio Disturbance	IEC 55015:2006 + A1:2007 + A2:2009	
ESD*	IEC 61000-4-2	8 kv Air discharge 4 kv Contact discharge

\* Please consult the document ESD standards on Optodrive ED, ID and AC

### Production Setup

Production in accordance with IPC-6012-B and IPC-A-600G class 2

The LED Module is in accordance to EU Directive 2002/95/EC (ROHS)

The bare PCB is isolation tested with 3000VDC/10mA for 10 seconds

### PCB Material Setup

In all questions regarding the bare PCB please use “Material Data sheet Optodrive” as a guideline.

### Light fitting

Light fitting standard according to EN/IEC-60598-1 production control specifications function test. The insulation test of 500Vdc should be performed 1s with min 2MΩ. No dielectric test should be performed.



## Precautions for use

---

- This device should not be used in any type of fluids such as water, oil, organic solvent etc.
- When cleaning is required, use only water together with mild soap on the outside of the lens. Cleaning inside of the LED module is strictly prohibited.
- The appearance and specifications of the product may be modified for improvement without notice.
- Long time exposure of sunlight or occasional UV exposure will cause lens discoloration.
- Opening of the LED module is prohibited due to risk of EMC, dust, grease and other exposures that will damage it.
- The LED Module should always be mounted to a proper heat sink before it's connected with its proper leads.

### Handling in regards to static electricity

- The Optodrive products have integrated circuits (IC) on board that may be damaged if exposed to static electricity. Please handle the products only while using equipment that prevents static electricity. Do not handle them without having ESD protection.
- The Optodrive products are not be installed into the end product without proper ESD protection.
- Optodrive LED Modules meet IEC61547:2009 and IEC61000-4-2. We recommend the light fixture manufacturer to take the mentioned standards under consideration.

### Storage before use

- Use only properly rated test equipment and tools for the rated voltage and current of the product being tested.
- It is strongly suggested to wear rubber insulated gloves and rubber bottom shoes while handling the product.
- Do not wear any conductive items (such as jewelry) which could accidentally contact electric circuits.
- Faults, lightning, or switching transients can cause voltage surges in excess of the normal ratings.
- Internal component failure can cause excessive voltages.
- Stored or residual electricity in long wire could be hazardous.



## ROHS II Compliant

---

All our LED modules meet the Restrictions of Hazardous Substances (RoHS II)!

There has been a growing consensus that Lead Free Systems should increase for the safety of our environment. It is a very serious problem that lead and other harmful materials are being used in commercial and industrial products, causing more and more environmental problems. This has led to regulations such as RoHS (Restriction of the use of certain Hazardous Substances) from the EU and the Japan Ministry of Trade and Industry (MITI). All LED module makers providing products to these countries should comply with these restrictions. In order to meet the RoHS II regulation, Optoga is strictly implementing a ban on lead and other hazardous materials in its products. This is in compliance with our responsibilities as good corporate citizens.

### Design for Environment:

According to the EU-directive 2011/65/EU (RoHS II) the following substances must not be used in this product

- Lead (Pb) alloys
- Mercury (Hg)
- Cadmium (Cd)
- Chromium (6+) compounds
- Polybrominated biphenyls (PBB)
- Polybrominated diphenyl ethers (PBDE)



## Theo AC FF

Document no:  
n/a

Revision:  
1.3

Page:  
Page 22 of 23

Object:  
**Datasheet Theo AC FLICKERFREE**

Author:  
SL

Date:  
2019-11-07

# Do you want to know more about benefits of OptoDrive LED?

Read more about OptoDrive at [www.optoga.com](http://www.optoga.com).

You can contact us via [info@optoga.com](mailto:info@optoga.com).

You can also call us on +46 (0)589 490 950.

## Optoga AB

Optoga was founded in November 2004 in Arboga, Sweden and has many years of experience in electronics design. The company develops and supplies LEDs and LED-module solutions for the lighting industry, vehicle manufacturers and electronics companies.

With the OptoDrive LED-module, Optoga has taken the initiative to replace strip lights, incandescent and halogen bulbs with LED-based sources.



Köpingsvägen 4 • SE-732 31 Arboga • SWEDEN

Tel +46 (0) 589 490 950

[info@optoga.com](mailto:info@optoga.com) • [www.optoga.com](http://www.optoga.com)

Copyright © 2017 Optoga AB. All rights reserved.